


Telephone 01704 228557

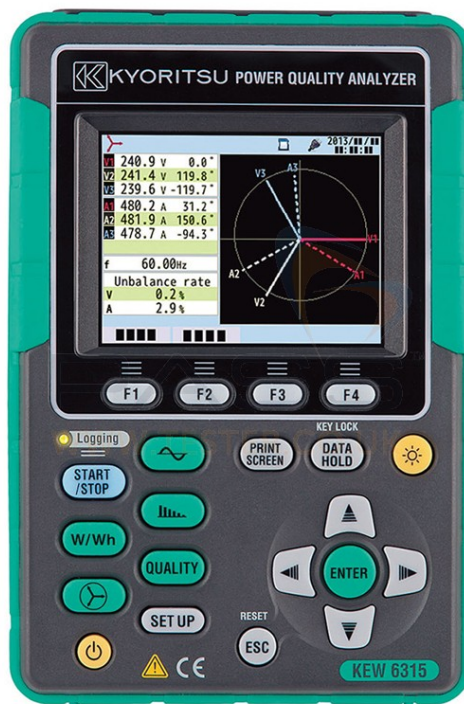

Product ID: KEW6315 - Kewtech KEW6315 Power Quality Analyser

Also there are two analogue input channels, you can monitor any variable for instance watch the change in electrical energy as inside and outside temperature changes - how cool is that!

PRODUCT INFORMATION

KEY BENEFITS

- Data logging, harmonics, waveform and events (transients, dips, swells and interrupts) measured all in one go.
- Massive memory enables you to conduct extended surveys without worry of running out of storage
- Quick report facility allows you to download and produce a report in 2 minutes and put a cost to energy used
- EN 50160 automatic report - again within moments a 17 page report compares the measured data with the supply standard highlighting any errors
- Intuitive user interface means that you will soon be up and running and remember the setting up procedure
- Kit comprises everything you need to get you going
- Remote monitoring on PC and Android devices via Bluetooth

KEY FEATURES

- High accuracy measurements +/- 0.2% Volts/Current, 0.3% Energy
- Quick set up guide - on screen guides and wiring check
- Quick report enables fast download to report, extracting the salient data immediately. You can enter daytime and night time tariffs to get the cost of the electricity used. You can even look at a subset of the data i.e. just Monday working hours.
- Extremely compact design
- Simultaneous measurements of means that you do not have to do several surveys on the same site
- Instantaneous Values
- Measures Flicker
- Energy consumed
- Demand monitor / prediction

Wave form and vector diagrams
Harmonic measurements and analyser
Displays and calculates power factor and corrective capacitors
Includes three 1000A flexi-clamps accurate down to 1A
Print screen function saves any screen, including connection diagram – for fast report writing
Fourth current channel for measured neutral current (neutral current also calculated) or earth leakage
Test leads colour coded to current British Standard.
Comprehensive user friendly intuitive software
Internal memory plus flash card memory – up to 1GB!
Digital output for use to control max demand
Two additional inputs for external sensors. For instance to monitor lighting / temperature levels
Complies fully to IEC61010-1 Cat IV 300V
INCLUDES

Everything to get you started:

Three 1000A flexi-clamps
Four voltage test leads
PQA software
SD card
OPTIONAL

KEW9132 Magnetic carrying case for mounting inside metal distribution boards
KEW8312 Power supply adaptor for taking single phase supply from the test leads to power the instrument
KEW8147 Load / leakage clamp 70A

Our Price: 2499.00 GBP + VAT

address xxxx

Sales Phone 01704 228557 Website: www.ttec.co.uk